



■ Features :

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in constant current limiting circuit
- 1U low profile 41mm
- Built-in cooling fan ON-OFF control
- Built-in DC OK signal
- Built-in remote ON-OFF control
- Standby 5V@0.3A
- Built-in remote sense function
- No load power consumption<0.5W (Note.6)
- 5 years warranty



**SPECIFICATION**

| MODEL                 | HRPG-300-3.3   | HRPG-300-5  | HRPG-300-7.5 | HRPG-300-12                 | HRPG-300-15  | HRPG-300-24  | HRPG-300-36  | HRPG-300-48  |              |
|-----------------------|--|---|--------------|-----------------------------|--------------|--------------|--------------|--------------|--------------|
| OUTPUT                | DC VOLTAGE   | 3.3V  | 5V           | 7.5V                        | 12V          | 15V          | 24V          | 36V          | 48V          |
|                       | RATED CURRENT  | 60A   | 60A          | 40A                         | 27A          | 22A          | 14A          | 9A           | 7A           |
|                       | CURRENT RANGE  | 0 ~ 60A   | 0 ~ 60A      | 0 ~ 40A                     | 0 ~ 27A      | 0 ~ 22A      | 0 ~ 14A      | 0 ~ 9A       | 0 ~ 7A       |
|                       | RATED POWER  | 198W  | 300W         | 300W                        | 324W         | 330W         | 336W         | 324W         | 336W         |
|                       | RIPPLE & NOISE (max.) Note.2   | 80mVp-p   | 90mVp-p      | 100mVp-p                    | 120mVp-p     | 150mVp-p     | 150mVp-p     | 250mVp-p     | 250mVp-p     |
|                       | VOLTAGE ADJ. RANGE   | 2.8 ~ 3.8V  | 4.3 ~ 5.8V   | 6.8 ~ 9V                    | 10.2 ~ 13.8V | 13.5 ~ 18V   | 21.6 ~ 28.8V | 28.8 ~ 39.6V | 40.8 ~ 55.2V |
|                       | VOLTAGE TOLERANCE Note.3   | ± 2.5%  | ± 2.0%       | ± 2.0%                      | ± 1.0%       | ± 1.0%       | ± 1.0%       | ± 1.0%       | ± 1.0%       |
|                       | LINE REGULATION  | ± 0.5%  | ± 0.5%       | ± 0.5%                      | ± 0.3%       | ± 0.3%       | ± 0.2%       | ± 0.2%       | ± 0.2%       |
|                       | LOAD REGULATION  | ± 1.0%  | ± 1.0%       | ± 1.0%                      | ± 0.5%       | ± 0.5%       | ± 0.5%       | ± 0.5%       | ± 0.5%       |
|                       | SETUP, RISE TIME   | 1000ms, 50ms/230VAC      2500ms, 50ms/115VAC at full load   |              |                             |              |              |              |              |              |
| HOLD UP TIME (Typ.)   | 16ms/230VAC      16ms/115VAC at full load  |   |              |                             |              |              |              |              |              |
| INPUT                 | VOLTAGE RANGE Note.5   | 85 ~ 264VAC   |              | 120 ~ 370VDC                |              |              |              |              |              |
|                       | FREQUENCY RANGE  | 47 ~ 63Hz   |              |                             |              |              |              |              |              |
|                       | POWER FACTOR (Typ.)  | PF>0.95/230VAC  |              | PF>0.99/115VAC at full load |              |              |              |              |              |
|                       | EFFICIENCY (Typ.)  | 80%   | 82%          | 86%                         | 88%          | 88%          | 87%          | 88%          | 89%          |
|                       | AC CURRENT (Typ.)  | 3.5A/115VAC   |              | 1.8A/230VAC                 |              |              |              |              |              |
|                       | INRUSH CURRENT (Typ.)  | 35A/115VAC  |              | 70A/230VAC                  |              |              |              |              |              |
| LEAKAGE CURRENT       | <1.2mA / 240VAC  |   |              |                             |              |              |              |              |              |
| PROTECTION            | OVERLOAD   | 105 ~ 135% rated output power<br>Protection type : Constant current limiting, recovers automatically after fault condition is removed |              |                             |              |              |              |              |              |
|                       | OVER VOLTAGE   | 3.96 ~ 4.62V  | 6 ~ 7V       | 9.4 ~ 10.9V                 | 14.4 ~ 16.8V | 18.8 ~ 21.8V | 30 ~ 34.8V   | 41.4 ~ 48.6V | 57.6 ~ 67.2V |
|                       | OVER TEMPERATURE   | Shut down o/p voltage, recovers automatically after temperature goes down   |              |                             |              |              |              |              |              |
| FUNCTION              | 5V STANDBY   | 5VSB : 5V@0.3A ; tolerance ±5%, ripple : 50mVp-p(max.)  |              |                             |              |              |              |              |              |
|                       | DC OK SIGNAL   | PSU turns on : 3.3 ~ 5.6V ; PSU turns off : 0 ~ 1V  |              |                             |              |              |              |              |              |
|                       | REMOTE CONTROL   | RC+ / RC- : 4 ~ 10V or open = power on ; 0 ~ 0.8V or short = power off  |              |                             |              |              |              |              |              |
|                       | FAN CONTROL (Typ.)   | Load 35 ± 15% or RTH2 ≥ 50°C Fan on   |              |                             |              |              |              |              |              |
| ENVIRONMENT           | WORKING TEMP.  | -40 ~ +70°C (Refer to "Derating Curve")   |              |                             |              |              |              |              |              |
|                       | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing  |              |                             |              |              |              |              |              |
|                       | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C , 10 ~ 95% RH   |              |                             |              |              |              |              |              |
|                       | TEMP. COEFFICIENT  | ± 0.03%/°C (0 ~ 50°C)   |              |                             |              |              |              |              |              |
|                       | VIBRATION  | 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes  |              |                             |              |              |              |              |              |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS   | UL60950-1, TUV EN60950-1 approved   |              |                             |              |              |              |              |              |
|                       | WITHSTAND VOLTAGE  | I/P-O/P:3KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC   |              |                             |              |              |              |              |              |
|                       | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH  |              |                             |              |              |              |              |              |
|                       | EMC EMISSION   | Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3   |              |                             |              |              |              |              |              |
|                       | EMC IMMUNITY   | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2, heavy industry level, criteria A  |              |                             |              |              |              |              |              |
| OTHERS                | MTBF   | 176K hrs min.    MIL-HDBK-217F (25°C)   |              |                             |              |              |              |              |              |
|                       | DIMENSION  | 199*105*41mm (L*W*H)  |              |                             |              |              |              |              |              |
|                       | PACKING  | 0.95Kg;15pcs/15.3Kg/0.69CUFT  |              |                             |              |              |              |              |              |
| NOTE                  | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a>)</p> <p>5. Derating may be needed under low input voltages. Please check the derating curve for more details.</p> <p>6. No load power consumption&lt;0.5W when RC- &amp; RC+ (CN100 pin4,6) 0 ~ 0.8V or short.</p> |   |              |                             |              |              |              |              |              |

### Mechanical Specification


Case No.980A Unit:mm

#### Terminal Pin No. Assignment


| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4,5     | DC OUTPUT -V |
| 2       | AC/N       | 6,7     | DC OUTPUT +V |
| 3       | FG $\perp$ |         |              |

#### Connector Pin No. Assignment (CN100): HRS DF11-8DP-2DS or equivalent


| Pin No. | Assignment | Mating Housing                | Terminal                       |
|---------|------------|-------------------------------|--------------------------------|
| 1       | AUX        | HRS DF11-8DS<br>or equivalent | HRS DF11-**SC<br>or equivalent |
| 2       | AUXG       |                               |                                |
| 3       | DC-OK      |                               |                                |
| 4       | RC-        |                               |                                |
| 5       | GND        |                               |                                |
| 6       | RC+        |                               |                                |
| 7       | +S         |                               |                                |
| 8       | -S         |                               |                                |

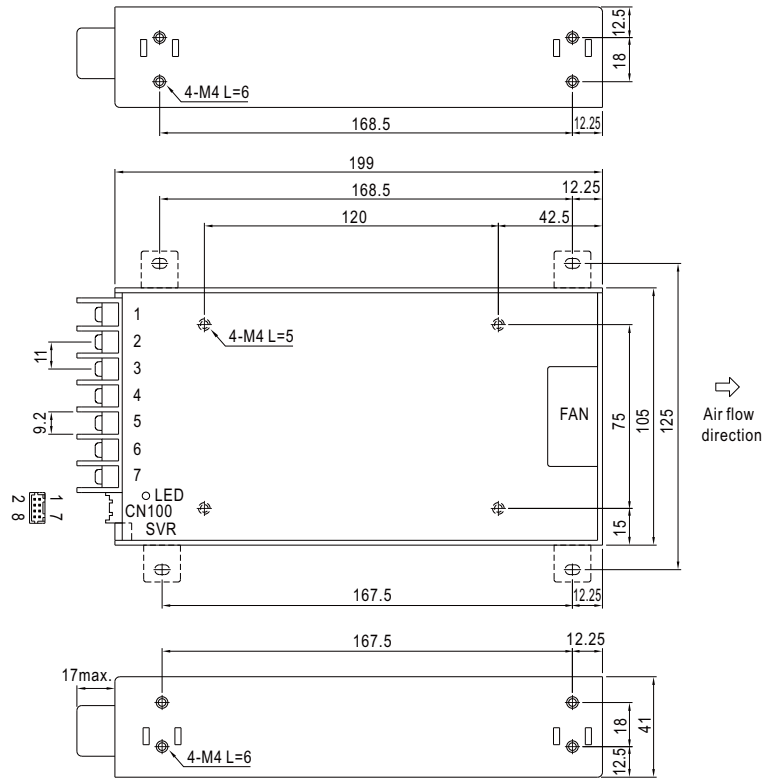


### Block Diagram

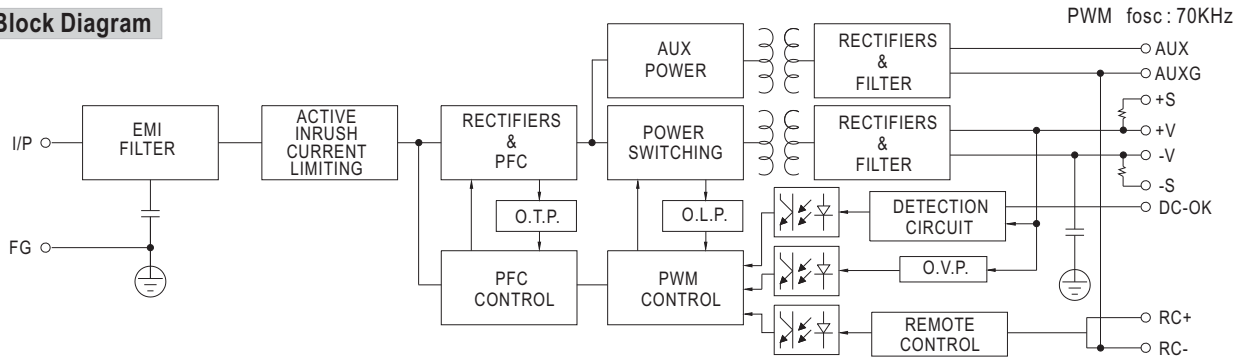

### Derating Curve

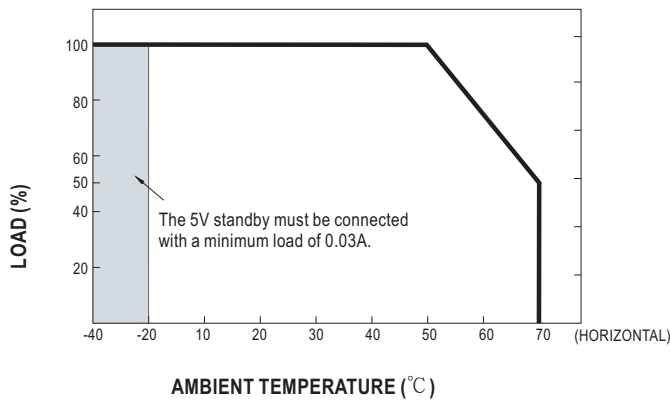

### Output Derating VS Input Voltage

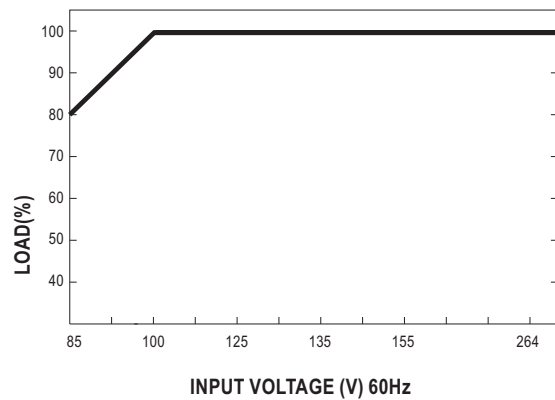


## Function Description of CN100

| Pin No. | Function | Description   |
|---------|----------|---|
| 1       | AUX      | Auxiliary voltage output, 4.75~5.25V, reference to pin 2(AUXG). The maximum load current is 0.3A. This output is not controlled by the "remote ON/OFF control".   |
| 2       | AUXG     | Auxiliary voltage output ground. The signal return is isolated from the output terminals (+V & -V).   |
| 3       | DC-OK    | DC-OK signal is a TTL level signal, referenced to pin5(DC-OK GND). High when PSU turns on.  |
| 4       | RC-      | Remote control ground.  |
| 5       | GND      | This pin connects to the negative terminal(-V). Return for DC-OK signal output.   |
| 6       | RC+      | Turns the output on and off by electrical or dry contact between pin 4 (RC-), Short: Power OFF, Open: Power ON.   |
| 7       | +S       | Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. |
| 8       | -S       | Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. |

## Function Manual

### 1.Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.5V.

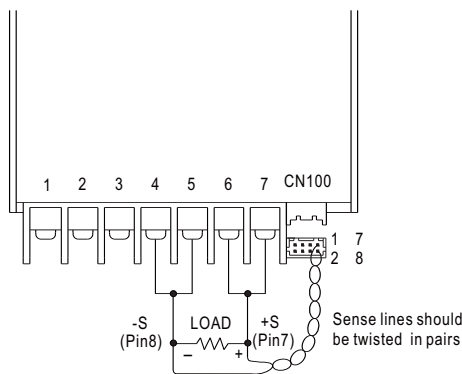


| CN100 |      |       |     |    |   |
|-------|------|-------|-----|----|---|
| 1     | AUX  | DC-OK | GND | +S | 7 |
| 2     | AUXG | RC-   | RC+ | -S | 8 |

Fig 1.1

### 2.DC-OK Signal

DC-OK signal is a TTL level signal. High when PSU turns on.

| Between DC-OK(pin3) and GND(pin5) | Output Status |
|-----------------------------------|---------------|
| 3.3 ~ 5.6V                        | ON            |
| 0 ~ 1V                            | OFF           |

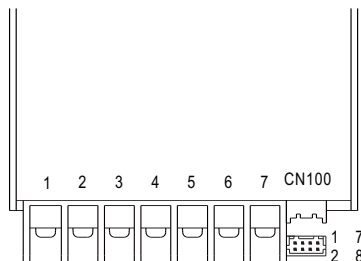

| CN100 |      |       |     |    |   |
|-------|------|-------|-----|----|---|
| 1     | AUX  | DC-OK | GND | +S | 7 |
| 2     | AUXG | RC-   | RC+ | -S | 8 |

Fig 2.1

### 3.Remote Control

The PSU can be turned ON/OFF by using the "Remote ON/OFF" function

| Between RC+(pin6) and RC-(pin4) | Output Status |
|---------------------------------|---------------|
| SW ON (Short)                   | OFF           |
| SW OFF (Open)                   | ON            |

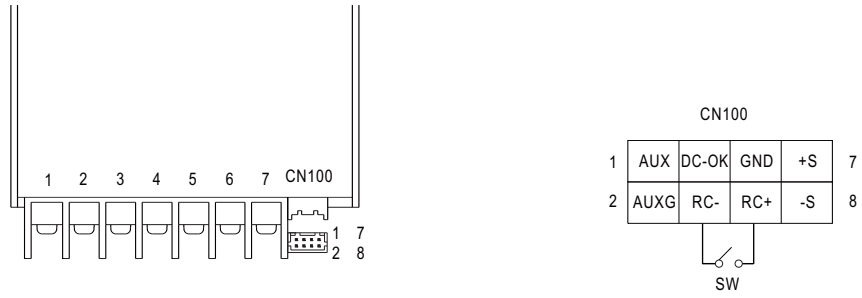


Fig 3.1